



SHERMAN & REILLY

400 West 33rd St. • Chattanooga, TN 37410 USA

Toll Free 1.800.251.7780 • Phone 423.756.5300 • Fax 423.756.2948

Web Site - <http://www.sherman-reilly.com> • E-Mail - sales@sherman-reilly.com

**PULLER -
TENSIONER
PT-3366**

Model PT-3366-D Puller-Tensioner



An ideal companion to the PT-2766 “BV” **Model**, the PT-3366--D-T **SUPER DUTY** offers all the features of the “Original PT” with more muscle. This machine spans the gap between moderate distribution construction and sub-transmission.

Powered by a 42 HP Diesel engine, liquid cooled and rated with 68,000 inch-pounds of continuous torque, complete pull and tension capabilities, and directly driven by hydraulic motor through a planetary gear reducer with automatic spring applied/hydraulic pressure released braking system. Trailer mounted, the PT-3366--D-T is fully equipped with hydraulic front and drop leg rear leveling jacks, DOT lighting, adjustable pintle eye, single axle. Dual tires and electric brakes are standard.

Also available is levelwind and pulling drum designed for underground construction and interchangeable bullwheels for pulling or tensioning. RCR-60 reconductoring reel. Spider rewind and other PT-2766-BV options also available.

The proven performance and flexibility of the PT 2766-BV is now available for today's requirements of larger conductors and higher stringing tensions. If you like the PT-2766 system, you'll love the PT-3366-D-T **SUPER DUTY!**

Manufacturer Note: Most options built for the PT-2766-BV are interchangeable with the PT-3366.

**3366
SUPER
DUTY**

SHERMAN & REILLY

400 West 33rd St. • Chattanooga, TN 37410 USA


Toll Free 1.800.251.7780 • Phone 423.756.5300 • Fax 423.756.2948

Web Site - <http://www.sherman-reilly.com> • E-Mail - sales@sherman-reilly.com




Model PT-3366-D Puller-Tensioner

SUPER DUTY

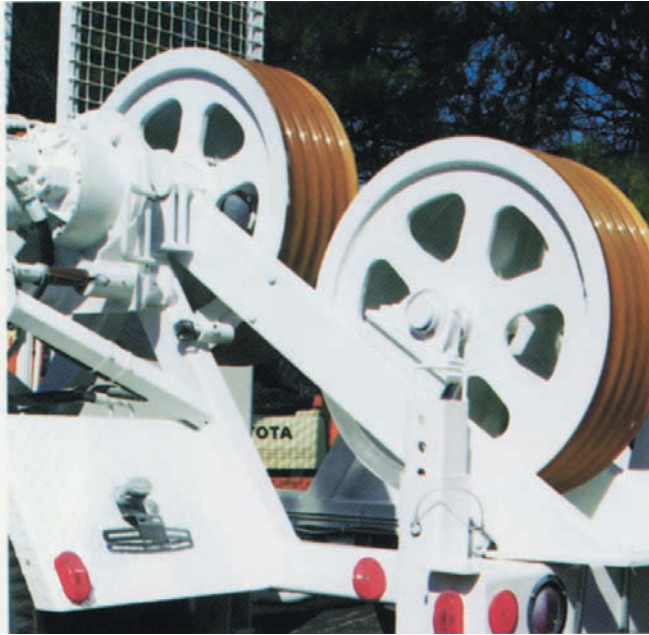

BULLWHEEL OPTION

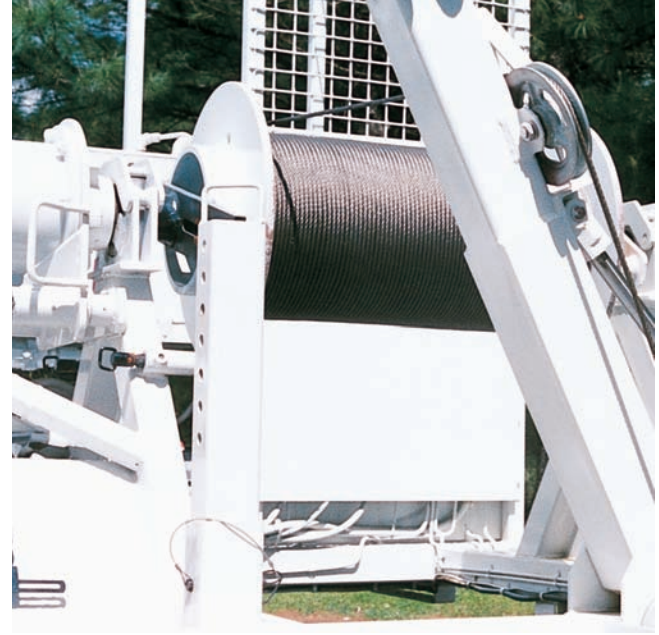

UNDERGROUND PULLER

GENERAL SPECIFICATIONS*

Maximum Pulling or
Tensioning Capacity68,000 in. lbs. of torque
(4,500 lbs. line pull on 30 in. dia. reel)

Maximum Speed2.5 mph

Spindle2⁵/₈ in. O.D.

EngineDiesel, Kubota 4cyl.
42hp Enclosed Power Unit

Fuel Capacity18 gal.

Drive SystemHydraulic (Totally
enclosed, self-contained)

Hydraulic System OilHyken Gold MV
transmission fluid

Fail Safe BrakeSpring applied/hydraulic
pressure released

Maximum Conductor Reel66 in. O.D. x 38 in. Wide
(RM 66.32)

Maximum Conductor Weight5,900 lbs.

ConstructionRectangular Steel Tubing

Overall Length (Approximate)201 in.

Overall Width (Approximate)96 in.

Height to Top of Safety Screen (Approximate)102 in.

TRAILER SPECIFICATIONS

Maximum Gross Weight Rating11,000 lbs.

TiresDual

Brake ActuationElectric
(Air/Hydraulic Optional)

Electric SystemSealed 12 Volt System

Front JackHydraulic

Rear JacksPin Type

TowingAdjustable Pintle Eye

Lights (Tail, Turn, Stop and Clearance)12 Volt

PaintSafety Orange, Standard

OPTIONS

Steel Pulling Drum46" dia. Flange x 18" dia.
Core x 30" Inside Width

Special Steel Pulling Drum44¹/₂" dia. Flange x 12³/₄"
dia. Core x 32" Inside Width

LevelwindHydraulic

Overhead/Underground Level WindHydraulic

Payout (Overspin) BrakeHydraulic

Power Take-Off (Curb-Side)Hydraulic

RCR Reconducting Reel60" dia. x 38" Width
Outside

*Dimensions, weights, capacities are approximate. Manufacturer's specifications subject to change without notice.



Toll Free 1.800.251.7780

ISO 9001:2000 Certified

© Copyright 2000, Sherman & Reilly, Inc. Chattanooga, Tennessee