



SHERMAN & REILLY

400 West 33rd St. • Chattanooga, TN 37410 USA

Toll Free 1.800.251.7780 • Phone 423.756.5300 • Fax 423.756.2948

Web Site - <http://www.sherman-reilly.com> • E-Mail - sales@sherman-reilly.com

Overhead

54" V-Groove Bullwheel Adapter



The Sherman & Reilly 54 inch "V" groove bullwheel adapter is designed to withstand 15,000 lb. line pull or tension. The bullwheel is flame-cut hardened steel cast with 90-92 "A" scale durometer hardness polyurethane. The "V" groove is precision CNC machined for proper identical radius and depth on the entire circumference to eliminate differential in pulling-tensioning forces. This adapter can be used with a full range of S&R overhead drum type pullers. It is ideal for pulling in new conductor or re-conductoring using the old existing conductor as the "pulling line." The "V" groove bullwheel adapter includes a 4-roller urethane fairlead window that opens to allow the removal of the conductor.

Toll Free 1.800.251.7780

ISO 9001 Certified



Overhead

SHERMAN & REILLY

400 West 33rd St. • Chattanooga, TN 37410 USA

Toll Free 1.800.251.7780 • Phone 423.756.5300 • Fax 423.756.2948

Web Site - <http://www.sherman-reilly.com> • E-Mail - sales@sherman-reilly.com



54" V-Groove Bullwheel Adapter

GENERAL SPECIFICATIONS

Line Ratings for pulling or tensioning:

Model PT-2766-B-D-T	1,925 lb.
Model PT-3366-D-T	2,500 lb.
Model P-6048-D-T	5,330 lb.
Model P-1260-D-T	13,333 lb.

Bullwheel Outside Diameter

54"

Bullwheel Width

6-1/2"


Maximum Rope Diameter

1-1/2"

Maximum Conductor Diameter

1-1/2"

Bullwheel Lining Urethane CNC Precision Machined

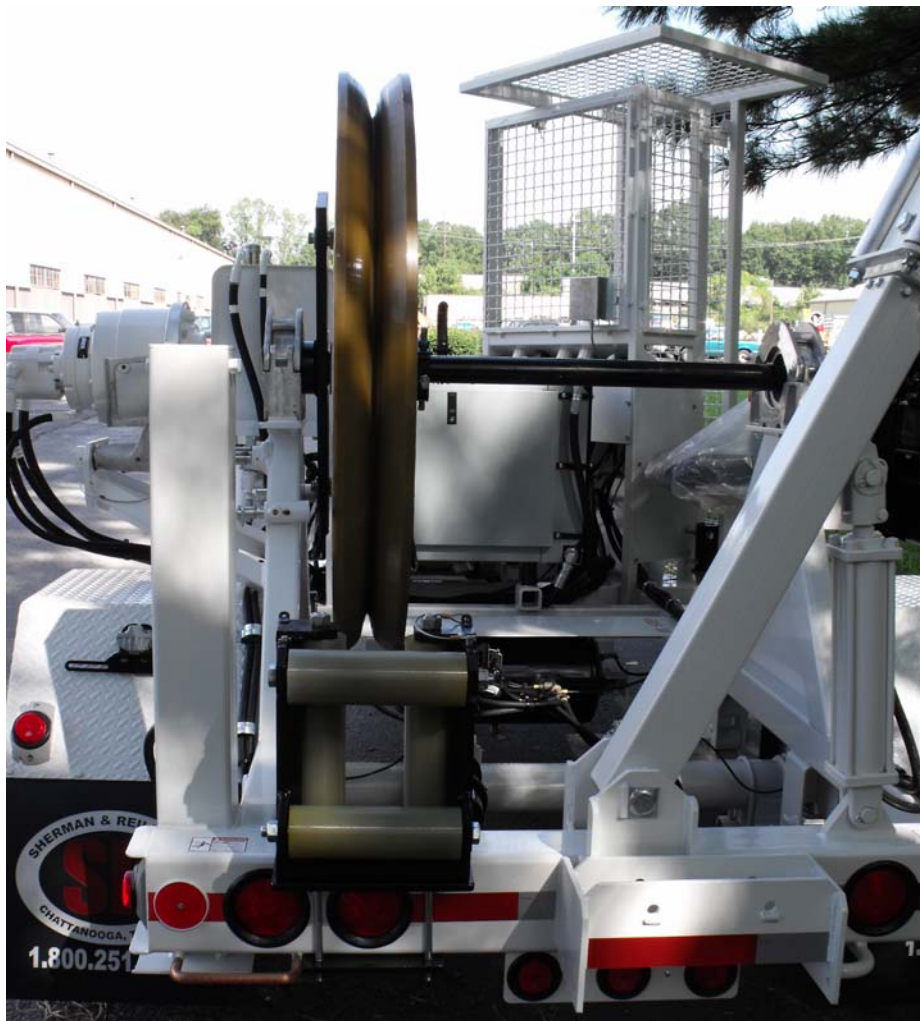

* Dimensions, weights, capacities are approximate. Manufacturer's specifications subject to change without notice.

Toll Free 1.800.251.7780

ISO 9001 Certified

