



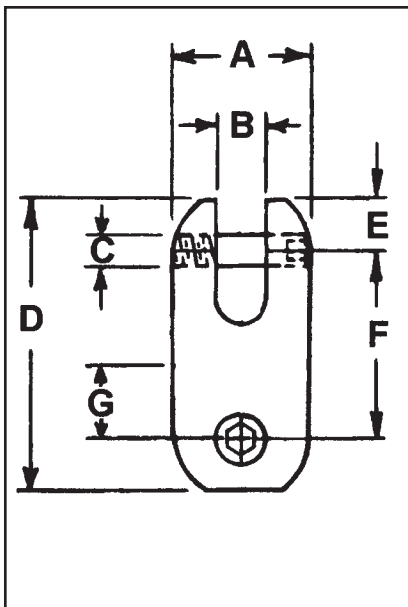

**S & R Connectors**

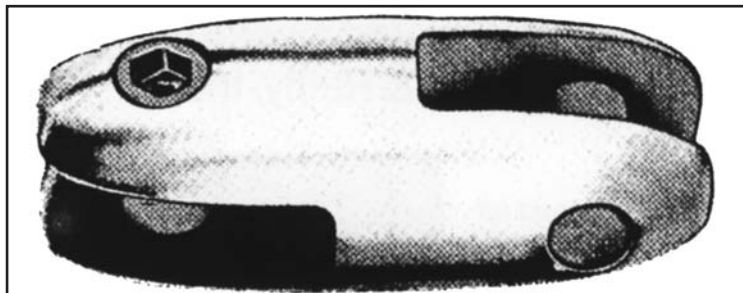

**General Specifications:**

The S&R Connectors do not rotate. They are not intended as a swivel replacement if rotation is desirable. They are a convenient, economical way to connect when rotation is not needed or is detrimental.

A swivel is not recommended for use with three-strand synthetic ropes. Swivels are not needed for connecting Uniline® rope, but are recommended.

These Connectors provide a fast, economical method of connecting pulling lines and conductors. Constructed of high-strength, heat treated steel, connectors are short and light with contoured nose to allow easy passage through sheaves.

Uniline® is a registered trademark of Wall Industries, Inc.

Model No.	Max Working Load, lbs	Dimensions, Inches						
		A	B	C	D	E	F	G
L-40	4,000	1-1/4	1/2	3/8	2-3/4	7/16	1-7/8	3/4
L-75	7,500	1-7/16	9/16	7/16	3-5/16	9/16	2-3/16	27/32
L-100	10,000	1-7/8	3/4	5/8	4-1/2	13/16	2-7/8	1-1/8
L-133	13,300	2	3/4	5/8	4-3/4	7/8	3	1-1/8
L-160	16,000	2-7/16	1	7/8	6-1/8	1-1/8	3-7/8	1-9/16

\*Dimensions, weights, capacities are approximate. Manufacturer's specifications subject to change without notice.

