

**ALL
PURPOSE
BLOCK**

SHERMAN & REILLY

400 West 33rd St. • Chattanooga, TN 37410 USA

Toll Free 1.800.251.7780 • Phone 423.756.5300 • Fax 423.756.2948

Web Site - <http://www.sherman-reilly.com> • E-Mail - sales@sherman-reilly.com




All Purpose Snatch Block

For All Types of Rope Including Wire Rope



Model No. 4841

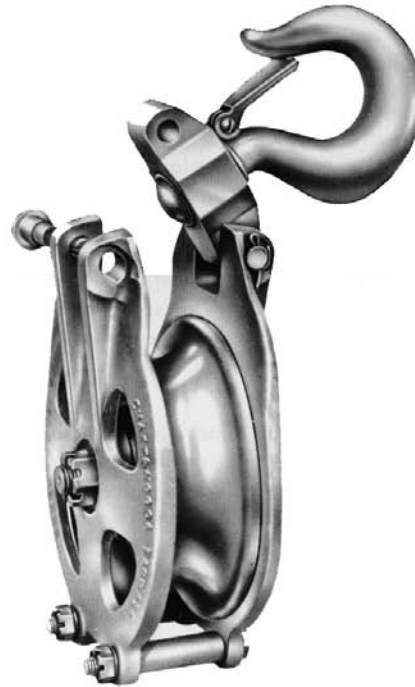

SPECIFICATIONS

Sheave Size	.6 $\frac{1}{2}$ " O.D. x 2 $\frac{1}{8}$ " Rim Width
Hook Opening	.1 $\frac{1}{2}$ in.
Maximum Rope (diameter)	.1 $\frac{1}{4}$ in.
Bearing Type	Ball Bearings
Overall Length from Point of Connection	.13 $\frac{3}{16}$ in.
Weight	.18 $\frac{1}{2}$ lbs.
M.W.L.	.3 tons

An excellent hoisting block, particularly for pole top application due to light weight and high strength features.

Wide groove sheaves for ropes up to 1 $\frac{1}{4}$ " in diameter. Aluminum-magnesium alloy frame, ductile iron sheave, forged steel SAFETY hook. All ferrous parts, except bearing surfaces, hot dip galvanized. The ALL PURPOSE snatch block is the finest general purpose side opening block ever built. Sheave has complete 360° guard built into frame. Wide upper frame makes block self-aligning when used in other than vertical position. This feature makes it ideal for lead off or haul back applications.

*Dimensions, weights, capacities are approximate. Manufacturer's specifications subject to change without notice.



Toll Free 1.800.251.7780

ISO 9001:2000 Certified

© Copyright 2000, Sherman & Reilly, Inc. Chattanooga, Tennessee