

# SHERMAN & REILLY

400 West 33rd St. • Chattanooga, TN 37410 USA

Toll Free 1.800.251.7780 • Phone 423.756.5300 • Fax 423.756.2948

Web Site - <http://www.sherman-reilly.com> • E-Mail - [sales@sherman-reilly.com](mailto:sales@sherman-reilly.com)



**BIG-LITTLE  
BLOCKS**

## 'Big-Little' Blocks

\*Dimensions, weights, capacities are approximate. Manufacturer's specifications subject to change without notice.

### DESIGNED FOR STRINGING OVERHEAD GROUND WIRES • ALSO IDEAL FOR USE WITH TRANSFORMER GIN


The "Big-Little" Block is little in overall length and weight but big in sheave and load capacity.

Side opening for ease in placing in hoisting line. Safety locking pin permits easy opening, positive locking and is captive to blocks. . . no parts to drop or lose.

Frame of high strength aluminum alloy, ribbed for extra strength and rigidity. Integral guard prevents wedging of lines. Sheaves mounted on anti-friction ball bearings are available with polished aluminum, neoprene lined, urethane lined, or ductile iron†. Urethane lining recommended when wire rope hoisting lines are to be used.

When ordering be sure to specify type of sheave, lining, and fitting desired.

†Ductile Iron available in 6", 6-A", or 8" only.

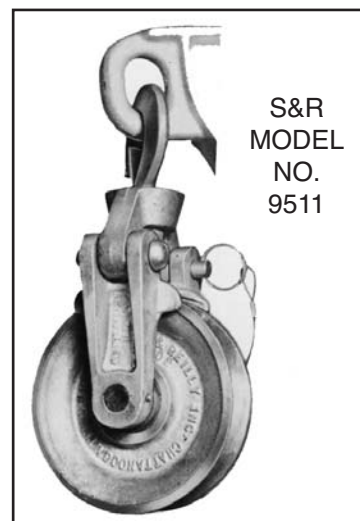

S&R  
MODEL  
NO.  
9511

### COMPLETE DIMENSIONS

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R
5*	5	1 1/2	3 1/2	27/32	1 7/8	1 5/8	10 9/32	4 1/4	7/16	3 31/32	31/32	7 11/16	1	3 3/16	2 3/4	-
6*	6	1 1/2	4 1/2	27/32	1 13/16	1 1/2	11 9/32	4 1/4	7/16	3 31/32	31/32	8 11/16	1	3 3/16	3 3/8	-
6	6	1 1/2	4 1/2	27/32	1 13/16	1 1/2	11 1/8	4 1/4	7/16	3 31/32	31/32	-	1	2 13/16	-	8
6-A	6	2	4 1/2	1	2	2	12	4 3/4	7/16	4 13/16	1	-	1	3 3/16	-	8 7/16
8	8	1 3/4	6 1/2	1 7/16	2 3/16	2	15 11/32	4 3/4	7/16	5 29/32	1 11/32	-	1	3 3/8	-	10 5/8
12	12	2	**	1 7/16	2 5/16	2	19 7/32	4 3/4	19/32	5 29/32	1 11/32	-	1	3 1/2	-	14 1/2


\* Full Frame Block - Urethane only for 5".

\*\* 9 5/8" Polished or 10" Neoprene Lined.

### SPECIFICATIONS

Sizes, In.	Max. Wire O. D., In.	Max. Working Load, lbs.
5*	3/4	3,000
6*	3/4	3,000
6	3/4	3,000
††6-A	3/4	3,000
8	3/4	5,000
12	1 1/8	7,500

††6-A" available in ductile iron only.

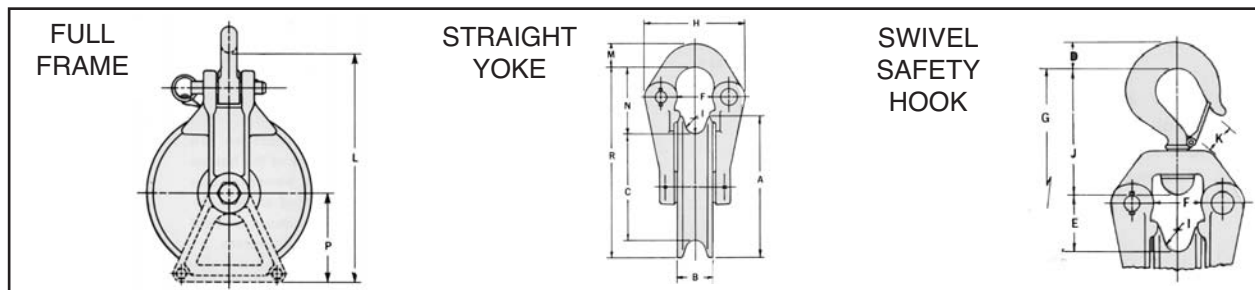

Toll Free 1.800.251.7780

ISO 9001:2000 Certified

© Copyright 2000, Sherman & Reilly, Inc. Chattanooga, Tennessee



# SHERMAN & REILLY


400 West 33rd St. • Chattanooga, TN 37410 USA

Toll Free 1.800.251.7780 • Phone 423.756.5300 • Fax 423.756.2948

Web Site - <http://www.sherman-reilly.com> • E-Mail - [sales@sherman-reilly.com](mailto:sales@sherman-reilly.com)

## STATIC BLOCKS

### Static Wire Stringing Blocks

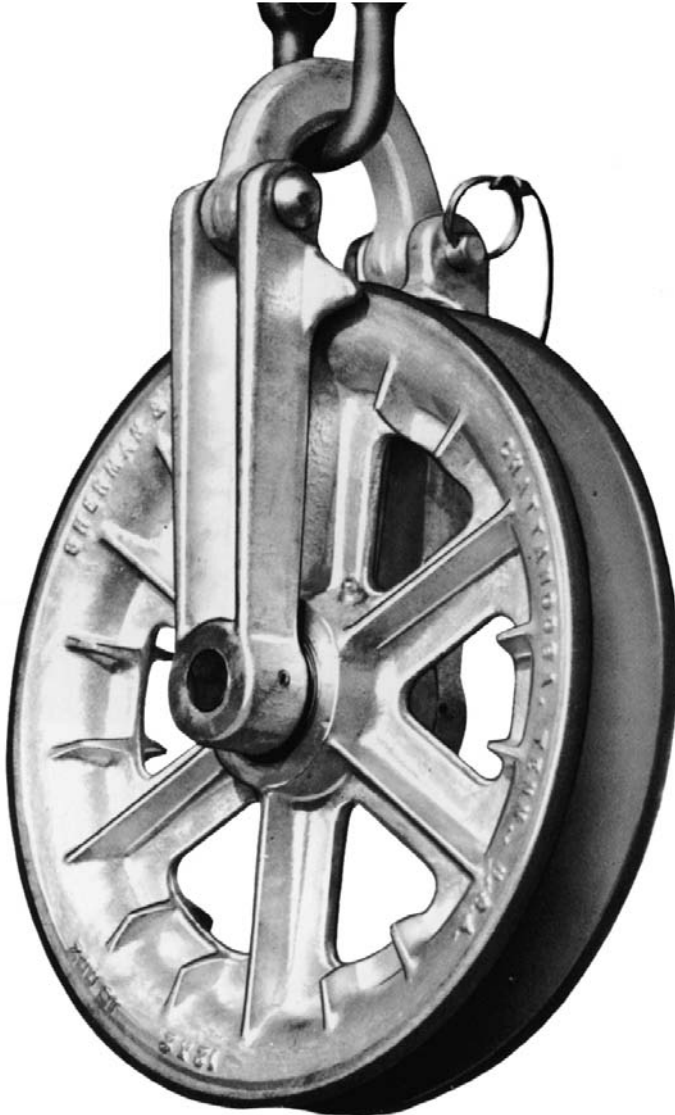

S&R MODEL NO. 9611  
FULL FRAME 5" ONLY

### THE 'BIG-LITTLE' STATIC BLOCK

#### S&R MODEL NO. 9510 STRAIGHT YOKE

The "Big-Little" Blocks are ideal for stringing overhead ground wire. For maximum diameter sheave size, yet minimum overall length, the 95 series will fit the most restricted places.

Available with sheave sizes through 12" O.D., 95 series has straight yoke or swivel safety hook.

Sheaves are polished aluminum, lined with Neoprene or Urethane, and ductile iron.†

The 96 series, shown above, has full frame protection. Sizes and specifications for 95 and 96 series are shown on opposite page 6-24.

†Ductile Iron available in 6", 6-A", or 8" only. 6-A" available in ductile iron only.