



SHERMAN & REILLY


400 West 33rd St. • Chattanooga, TN 37410 USA

Toll Free 1.800.251.7780 • Phone 423.756.5300 • Fax 423.756.2948

Web Site - <http://www.sherman-reilly.com> • E-Mail - sales@sherman-reilly.com

ACCESSORIES

Underground Accessories

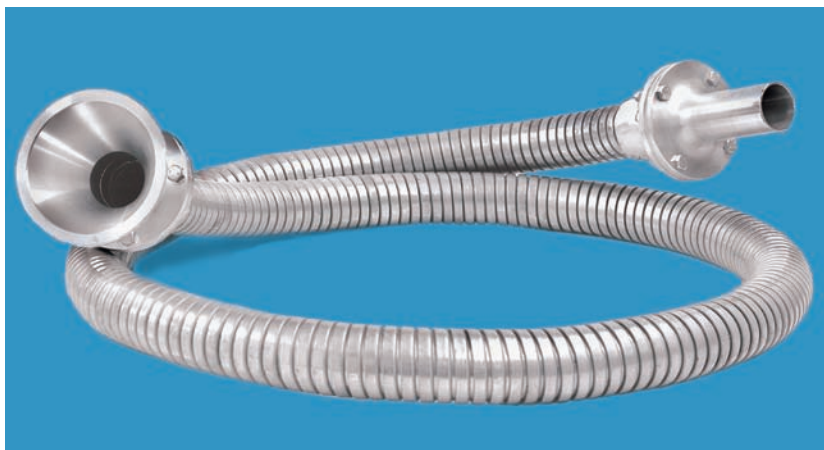

*Dimensions, weights, capacities are approximate. Manufacturer's specifications subject to change without notice.

SPECIFICATIONS


CATALOG NO. DESCRIPTION 2" DUCT	CATALOG NO. DESCRIPTION 5" DUCT
89310-09 2" x 9' Cable Feeder with Bell Mouth & Adapter	89350-09 5" x 9' Cable Feeder with Bell Mouth & Adapter
89310-12 2" x 12' Cable Feeder with Bell Mouth & Adapter	89350-12 5" x 12' Cable Feeder with Bell Mouth & Adapter
89315-03 2" x 3' Extension Only	89355-03 5" x 3' Extension Only
89315-06 2" x 6' Extension Only	89355-06 5" x 6' Extension Only
89315-09 2" x 9' Extension Only	89355-12 5" x 12' Extension Only
89315-12 2" x 12' Extension Only	89350-35 5" Adapter for 3 1/2" Duct
89310-10 2" Adapter for 1" Duct	89350-40 5" Adapter for 4" Duct
89310-13 2" Adapter for 1 1/4" Duct	89350-50 5" Adapter for 5" Duct
89310-15 2" Adapter for 1 1/2" Duct	89350-60 5" Adapter for 6" Duct
89310-20 2" Adapter for 2" Duct	89350-00 5" Feed Bell
89310-00 2" Feed Bell	89352-00 5" Feed Bell for Lubricant Injection
89310-02 2" Feed Bell for Lubricant Injection	6" DUCT
4" DUCT	89360-09 6" x 9' Cable Feeder with Bell Mouth & Adapter
89340-09 4" x 9' Cable Feeder with Bell Mouth & Adapter	89360-12 6" x 12' Cable Feeder with Bell Mouth & Adapter
89340-12 4" x 12' Cable Feeder with Bell Mouth & Adapter	89365-03 6" x 3' Extension Only
89345-03 4" x 3' Extension Only	89365-06 6" x 6' Extension Only
89345-06 4" x 6' Extension Only	89365-09 6" x 9' Extension Only
89345-09 4" x 9' Extension Only	89365-12 6" x 12' Extension Only
89345-12 4" x 12' Extension Only	89360-40 6" Adapter for 4" Duct
89340-30 4" Adapter for 3" Duct	89360-50 6" Adapter for 5" Duct
89340-35 4" Adapter for 3 1/2" Duct	89360-60 6" Adapter for 6" Duct
89340-40 4" Adapter for 4" Duct	89360-00 6" Feed Bell
89342-00 4" Feed Bell	89370-00 6" Feed Bell for Lubricant Injection
89340-00 4" Feed Bell for Lubricant Injection	





Underground Accessories

UG-308-SS UNDERGROUND BLOCK WITH 'SPLIT' SHEAVE

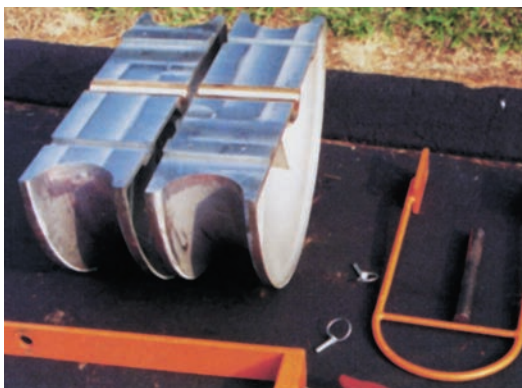

Completely disassembled



Sheave easily assembled without tools



Block Completely reassembled

This Model UG-308-SS can be disassembled and taken into manholes or vaults when space restricts size. Easily reassembled (no tools required), the UG-308-SS is rugged with 15,000 lb. maximum workload for up to 6" diameter cable. Split bronze bushing for long life, swivel safety hook and bail are standard.



UNDERGROUND PULLING CABLE

Replacement 3/8" dia. special steel strand designed for underground pulling. 1500 ft. standard length in stock. Other sizes and lengths also available.

Specifications, Standard Grip				
Catalog No.	Cable Diameter Range, Ins.	Max. Working Load, Lbs.	M (Inches)	E
033-04-1091	.75- .99	1,360	36	9
033-04-1092	1.00-1.49	1,920	36	9
033-04-1093	1.50-1.99	3,280	36	11
033-04-1094	2.00-2.49	3,700	36	12
033-04-1095	2.50-2.99	4,900	36	12
033-04-1096	3.00-3.49	4,900	36	14
033-04-1097	3.50-3.99	6,200	40	14

M - Mesh length at nominal diameter

E - Eye length

*Dimensions, weights, capacities are approximate. Manufacturer's specifications subject to change without notice.


CONNECTORS

S&R Underground Connectors are constructed of the highest grade steel and are designed to resist rotation under load. This protects the steel pulling cable, especially under heavy pulling loads. Note: Do not use line stringing swivels for pulling underground cable!



**MODEL E-35-D
MAXIMUM
WORKING LOAD
3,000 Lbs.**

**MODEL E-49-D
MAXIMUM
WORKING LOAD
8,000 Lbs.**

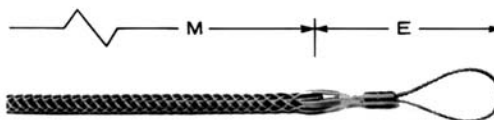

CABLE PULLING GRIPS By Kellems®

High strength, reliable, and easy to install, these grips are ideal for termination of cable for the pulling operation. Check cable size and maximum working load on chart before ordering.