




SHERMAN+REILLY®

# PLW-200H Pilot Line Winder

## 2,000-lb. Four-Drum Pilot Line Winder

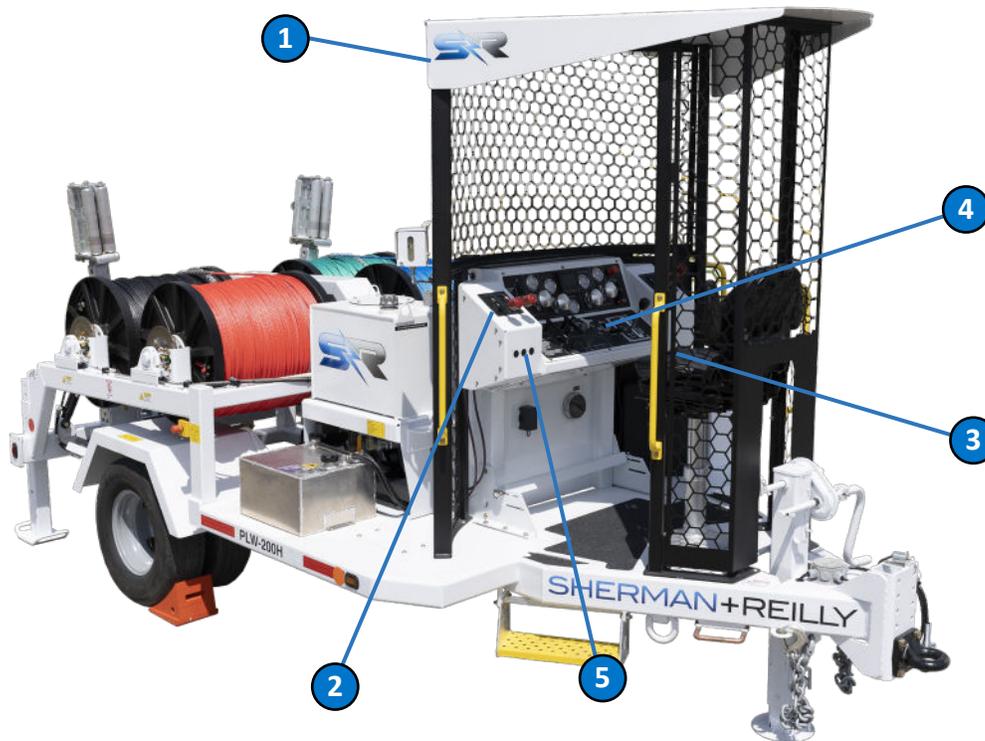

- 1 Safe-Zone® enclosure with Ocu-View™ screen
- 2 Remote reel engagement
- 3 Ergonomic Heritage control panel with adjustable seat
- 4 Synchronized levelwind control (optional)
- 5 Supports radio install, USB and 12V charging

### Features

- 2,000 lb. top-of-drum pulling capacity
- Supports the installation of four conductors simultaneously with levelwind control option
- Independent roller assemblies designed for each of the four pilot lines
- 6,000 ft. (3/16 in. rope) single-drum capacity

### Specifications

<b>Max. Pulling Capacity</b>	2,000 lb. (rated at top of drum)
<b>Max. Line Speed</b>	4 mph (at top of drum)
<b>Reel Capacity</b>	6,000 ft. of 7/16 in. PE-12 rope
<b>Drive System</b>	Hydraulic motor, chain, sprocket
<b>Engine</b>	Turbocharged, Tier-4 final, diesel, 49 HP, water-cooled Kubota®
<b>Fuel Capacity</b>	13 gal.
<b>Hydraulic Fluid</b>	ISO Grade 32
<b>Hydraulic Reservoir</b>	25 gal.
<b>Payout Brake</b>	Manually-controlled disc brakes, 12 in. dia. disc, bronze
<b>Levelwind</b>	Hydraulic, joystick-controlled (2)
<b>Operator's Safety Enclosure</b>	Safe-Zone® open-air enclosure
<b>Frame Construction</b>	Steel tubing, continuous weld
<b>Length (Overall, Nom.)</b>	17 ft. 3 in.
<b>Width (Overall, Nom.)</b>	8 ft. 6 in.
<b>Height (Overall, Nom.)</b>	9 ft. 1 in.
<b>Weight (w/ Rope)</b>	10,900 lb.
<b>GVWR</b>	11,500 lb.
<b>Suspension</b>	Leaf-spring
<b>Axle Configuration</b>	Single
<b>Wheel Configuration &amp; Tires</b>	Dual 235/85R 16LRG; 8-6.5
<b>Brakes (Trailer)</b>	Electric w/ break-away switch
<b>Towing Attachment</b>	3 in. pintle eye w/ (2) safety chains & hooks

<b>Tie Downs (4)</b>	5/8 in. dia. steel D-rings
<b>Bumper (SS/CS) Jacks</b>	Manual (2), drop & pin w/ optional hydraulic w/ galvanized shoe (2)
<b>Tongue Jack</b>	Manual, 2-speed hand crank w/ optional hydraulic w/ galvanized shoe (1)
<b>Electrical System</b>	12 VDC
<b>Battery</b>	12V, group 27
<b>Lights/Navigation</b>	US DOT, LED, 12 VDC
<b>Grounding</b>	3/4 in. dia. copper-clad steel loops (4)
<b>Wheel Chocks &amp; Holders</b>	Standard
<b>Fire Extinguisher</b>	ABC
<b>Drum Covers</b>	Vinyl
<b>Color</b>	S+R white or galvanized

### Options

- Tongue extension
- Light bar, 12V and USB charger
- Solar charger
- Galvanized finish
- Drum covers
- Hydraulic jacks
- Air brakes
- Know+Go onboard instructional video system



PLW-200H Control Panel