




SHERMAN+REILLY®

BWT-1545 BULLWHEEL TENSIONER

5,000 LBS. 54 IN. BULLWHEEL TENSIONER

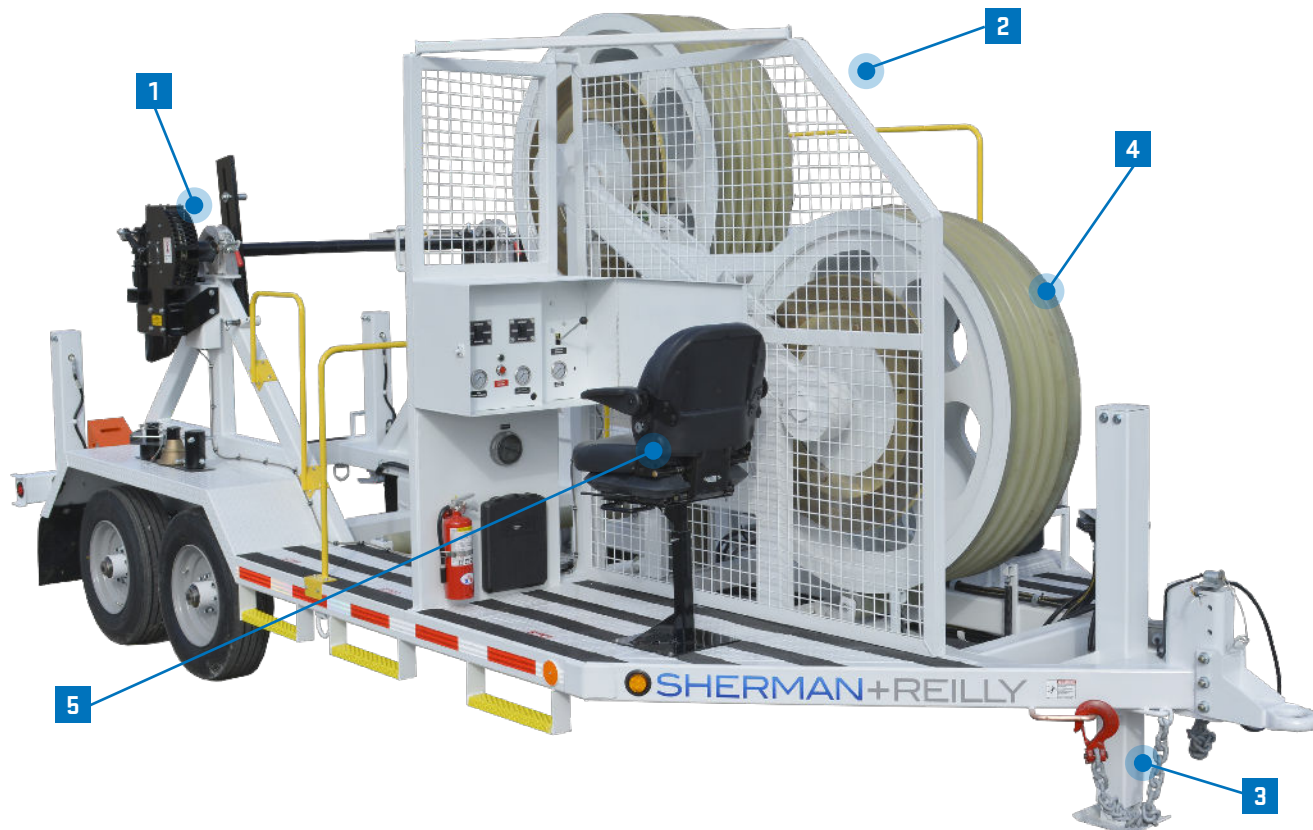

- 1** Integrated reel carrier
- 2** Seamless reel change with Sherman + Reilly's pillow block bearing support
- 3** Adjustable front and rear leveling jacks
- 4** A set of 54 in. five-groove bullwheels with solid-cast and machined urethane linings
- 5** Ergonomic operator's seat and safety cage

FEATURES

- Tensioning capacity of 5,000 lbs.
- Reel carrier accommodates reels up to 96 in. OD and 12,000 lbs. - ideal for larger conductors
- Standard with hydraulic power pack for hydraulic jack control
- Spring loaded conductor keeper
- Canted bullwheels for reeving right hand lay, left hand lay, and twisted pair conductor

BWT-1545 BULLWHEEL TENSIONER

5,000 LBS. 54 IN. BULLWHEEL TENSIONER

Sherman-Reilly.com

SPECIFICATIONS

Tensioning Capacity:	5,000 lbs.
Maximum Line Speed:	4 mph
Payout Brake:	16 in. Aluminum-Bronze (Hydraulic Control)
Maximum Reel Weight*:	12,000 lbs. fully loaded
Bullwheels:	Nominal Diameter: 54 in. Bullwheel Count: 2 ea. Bullwheel Groove Count: 5 per Bullwheel Groove Radius: 1 in. Precision Machined Groove Lining Material: Polyurethane Bottom of Groove Diameter: 51-3/4 in.
Fairlead Rollers:	Adjustable Urethane
Length: (Overall, Nom.)	23 ft.
Width: (Overall, Nom.)	8 ft., 6 in.
Height: (Overall, Nom.)	9 ft. 10 in. Loaded with 96 in. Reel
Weight*:	12,850 lbs. (Not Loaded)
Axle Configuration:	Tandem
Wheel Configuration & Tires:	245-70R-17.5-L
Wheel Chocks:	Standard
Fire Extinguisher:	ABC
Color:	S+R White
Reel Carrier:	96 in. OD x 54 in. wide
Reel Supports:	Sealed Ball Bearing, Quick Release
Trailer Brake:	Electrical (Air w/ABS Optional)

OPTIONS

Full vinyl cover
Bullwheel only cover
Payout brake cover
Retriever option for powered conductor take-up and rewind on reel stand
Solar battery charger
RDG-2100 Rotating Distribution Ground
DG-4100 Running Ground



Front view of the BWT-1545 Bullwheel Tensioner



Rear view of the BWT-1545 Bullwheel Tensioner