


UD-50 UNDERGROUND PULLER

5,000 LB. PULLING CAPACITY

FEATURES

- Compact and rugged for remote jobsites.
- Rope entry at a fixed point for better anchorage.
- Even, constant pulling force.
- Equipped with a tension dynamometer and adjustable overload cut-off.
- Available with Pad Mount Transformer Adapter (as shown), or with A-Frame adapter (as shown).

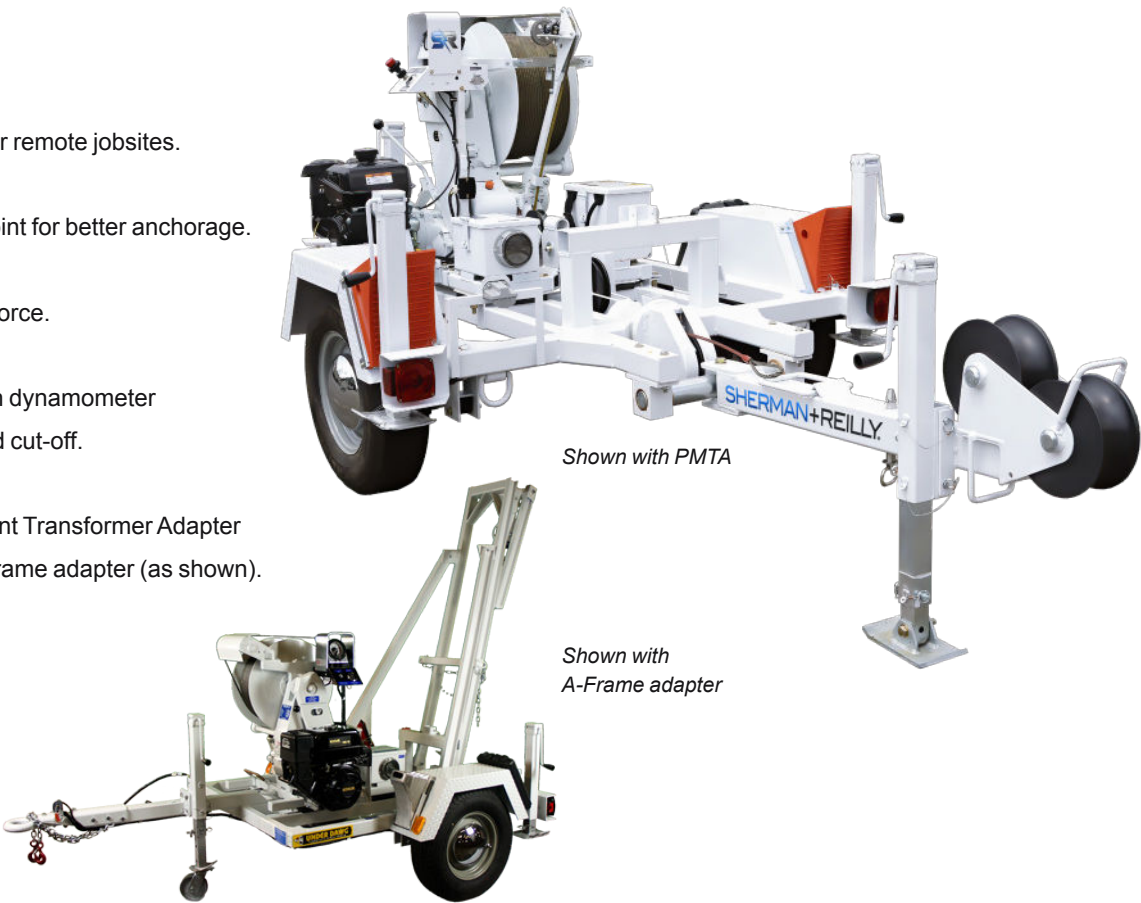

SPECIFICATIONS

Engine	8-10 Hp TBA	Tongue Jack	Screw Type with Wheel
Fuel Capacity	1.25 gallons	Bumper (SS/CS) Jacks	Screw Type with Shoe
Pulling Rope	3/8 in. dia. Steel Cable	Width, overall, approx.	63 in.
Reel Capacity	1,500 ft. (3/8 in. dia.)	Length, overall, approx.	91 in.
Skid Frame Construction	Steel tubing, continuous-weld	Frame Construction, trailer	Steel Tubing
Wheel Configuration & Tires	14 x 5.5 Drop Center; ST205-75R 14BC	Height, approx.	48 in.
Brakes, trailer	Electric, Standard	Weight*, approx.	1,200 lb.

OPTIONS

Air Adapter Kits
Underground Blocks Available
Brakes, trailer Hydraulic Surge

\*Specifications are subject to change