




SHERMAN+REILLY®

P-6000H HERITAGE PULLER

6,000 LB. PULLING CAPACITY

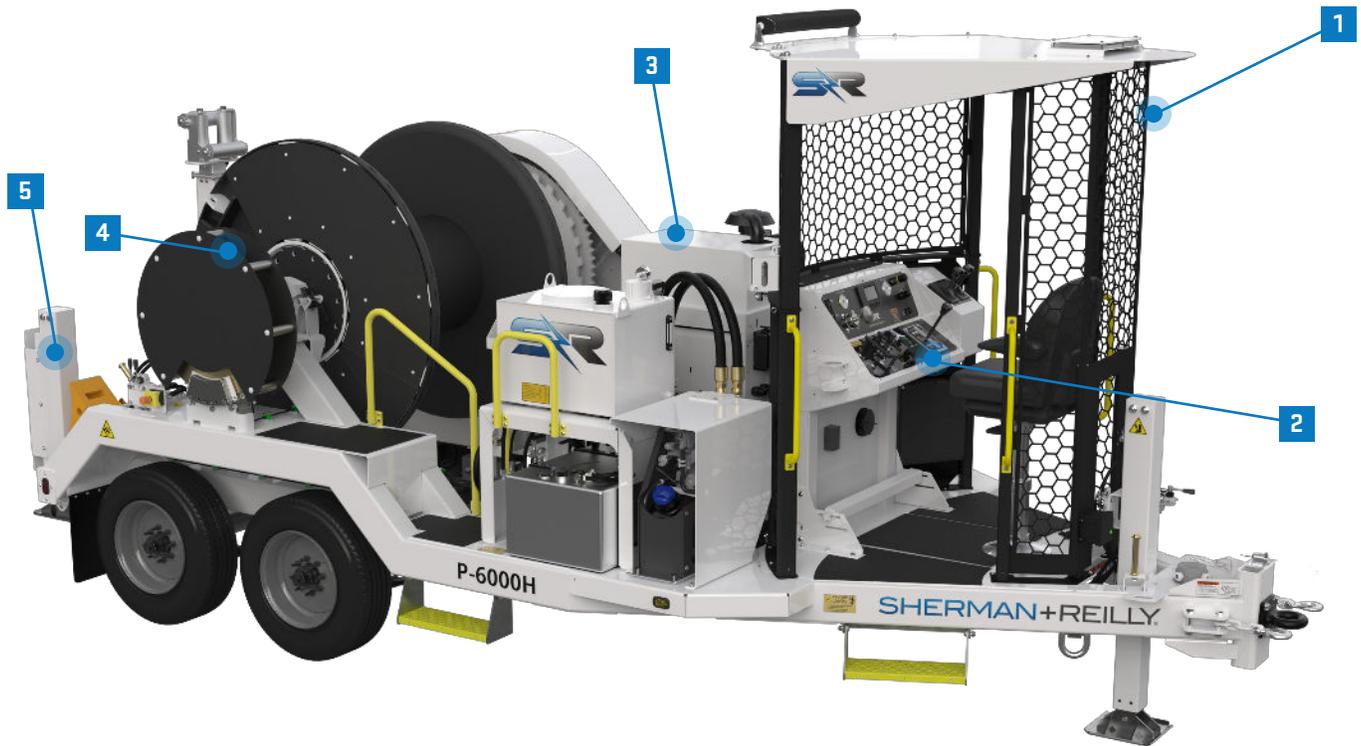

- 1 Safe-Zone® enclosure with Ocu-View™.
- 2 All stringing operations controlled from the safety of the Safe-Zone® enclosure.
- 3 Chain drive; single hydraulic motor, Penta-drive coupling system with remote engagement.
- 4 Helicopter-ready payout brake.
- 5 Manual jacks standard on bumper (2) and tongue (1). Hydraulic jacks option available.

FEATURES

- Capable of pulling 6,000 lb. on a 62 in. diameter reel.
- Maximum line speed: pulling 6 mph.
- Drum capacity:
Up to 15,500 ft. of 3/4 in. PE-12 or
25,000 ft. of 1/2 in. Ultrex.
- Ratchet Pawl failsafe brake.

P-6000H HERITAGE PULLER

6,000 LB. PULLING CAPACITY

Sherman-Reilly.com

SPECIFICATIONS

Maximum Pulling Capacity	6,000 lb. (rated at 30 in. from drum center)
Minimum Tensioning Capacity	1,250 lb. at top of drum and 3,500 lb. at core
Maximum Line Speed	Pulling: 6 mph Tensioning: 30 rpm
Mechanical Payout Brake	27.75 in. Bronze Disc, Helicopter-ready
Reconductoring Reel Size	72 in. diameter / 45 in. width
Maximum Reel Weight	Dynamic over the road 6,400 lb. Static jacks extended 11,000 lb.
Drum Dimensions	Core diameter: 24 in. Usable width: 36 in. Flange diameter: 62 in.
Drum Capacity	Up to 15,500 ft. of 3/4 in. PE-12 or 25,000 ft. of 1/2 in. Ultrex
Drive System	Chain drive: Single hydraulic motor, Penta-drive Coupling System with remote engagement
Drive System Engine	Turbocharged, Tier-4 Final Diesel, 116 Hp, water-cooled Kubota®
Fuel Capacity	30 gallons
Hydraulic Fluid	ISO Grade 32
Hydraulic Reservoir	25 gallon (32 usable gallons)
Hydraulic Fluid Filtration	10 microns, return filter
Levelwind	Hydraulically driven, operator Steady- Rest™ controlled directional change
Operator's Safety Enclosure	Open-air Safe-Zone® enclosure
Frame Construction	Steel tubing, steel plate, continuous weld
Length (Overall, Nom.)	20 ft. 6 in.
Width (Overall, Nom.)	8 ft. 6 in.
Height (Overall, Nom.)	9 ft. 4 in.
Weight (without rope)	13,410 lb. without rope 15,765 lb. with drum & rope
GVWR	20,500 lb.
Axle Configuration / Suspension	Tandem / Leaf-spring
Wheel Configuration & Tires	Single 235/75R 17.5 LJR
Brakes (Trailer)	Electric, with breakaway switch & visual indicator for battery charge state.
Towing Attachment	3 in. pintle eye, with two safety chains & hooks
Tie Downs	(4) 1 in. diameter steel D-rings
Bumper (SS/CS) Jacks	Single Speed Drop, Pin, and Crank
Tongue Jack	Two Speed Drop, Pin, and Crank
Battery / Electrical System	(2) 12V/810 CCA/Group 27
Lights / Navigation	US DOT, LED, 12 VDC

Grounding (2)	Grade 5H
Wheel Chocks	Standard (2)
Fire Extinguisher	ABC
Color	S+R White

OPTIONS

Hydraulic Jacks
Light bar with 12V accessory option
Air axle
Tongue extension
Solar battery charger
Galvanized finish available
72 in. X 45 in. RCR reel
Know+Go Instructional Video System



Streetside of P-6000H Heritage Puller

**EXPERIENCE THE
DIFFERENCE**

**CONTACT OUR TEAM
FOR A PRODUCT DEMO**

**(423) 756-5300 or
sales@sherman-reilly.com**