


Universal Stringing Blocks

Model XL-100

- Can be used in suspension utilizing a high-strength, hot-dipped, galvanized socket connector (ANSI C-29.2-71)
- 100% positive-locking, spring-loaded head pin assembly has large hook for hot stick operation
- Extremely rugged
- Low-friction, sealed ball bearings are lubricated for life of block under normal operating conditions
- Protected by the Sherman+Reilly Forever Warranty® program



XL-100 Block Shown with Optional Ground

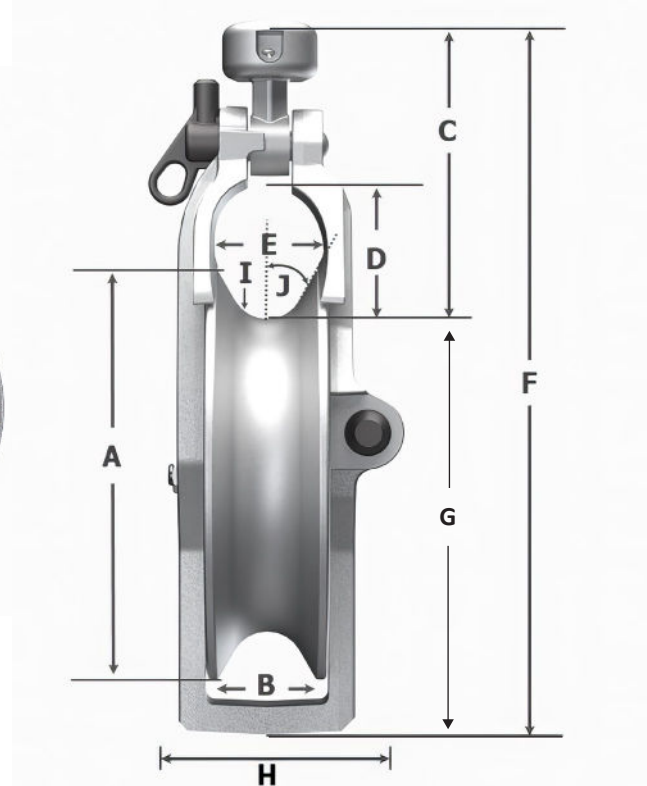

Specifications

Size	Outside Sheave Dia. (in.)	Rim Width (in.)	Inside Top of Socket to Bottom of Groove (in.)	Throat		Overall Length (in.)	Bottom of Groove Sheave Dia. (in.)	Width at Widest Point (in.)	Groove Radius (in.)	Flare Angle (degrees)
				Height (in.)	Width (in.)					
	A	B	C	D	E	F	G	H	I	J
11.75	11.75	3.375	8.025	3.875	3.188	20.08	9	7.263	1.063	30°

Size (in.)	Max. Working Load Limit (lb.)	Block Weight (lb.)
11.75	5,000	17.5