




SHERMAN+REILLY®

PLW-200X Pilot Line Winder

2,000-lb. Four-Drum Turret Pilot Line Winder

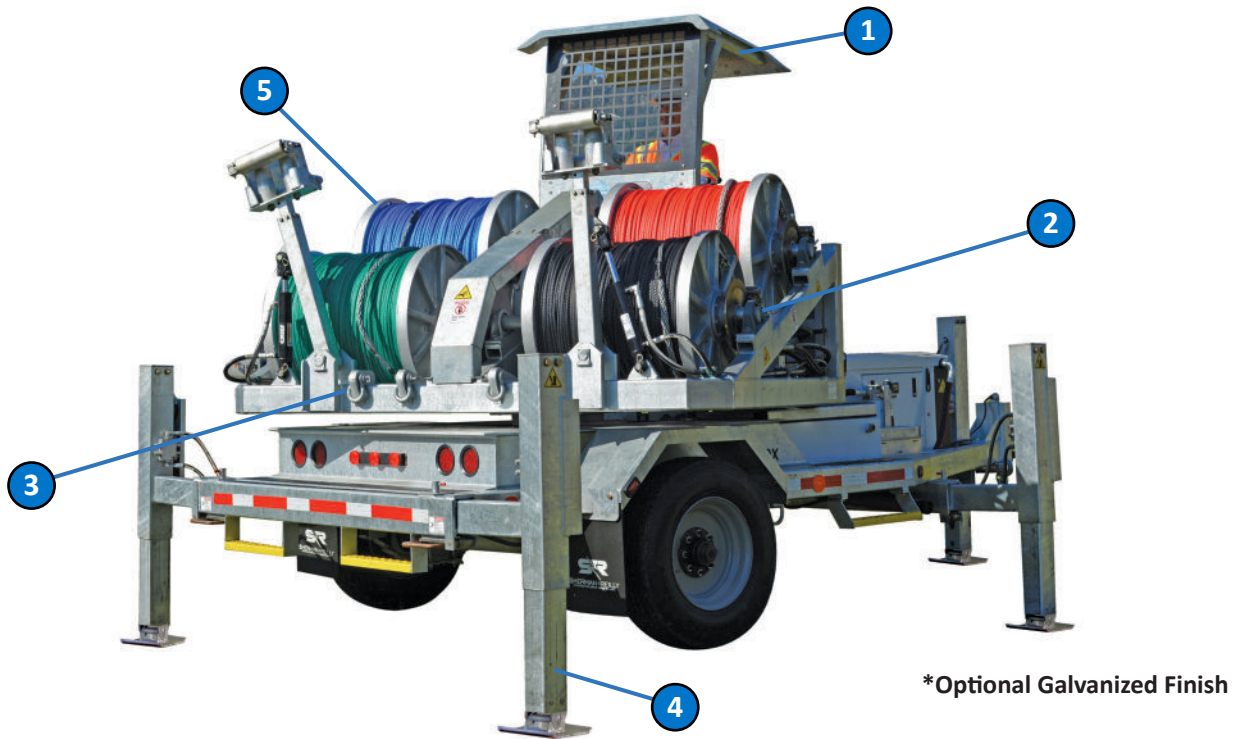

*Optional Galvanized Finish

- 1 Ergonomic operator's station with intuitive controls
- 2 Braking system with electric-over-hydraulic activation
- 3 Tie-off points rotate with turret for ease of use
- 4 Adjustable leveling jacks
- 5 6,000 ft. capacity for $\frac{7}{16}$ in. rope

Features

- 2,000 lb. pulling capacity
- Equipped with CAN bus technology and real-time self-diagnostics
- 360° continuous turret rotation for flexibility on the job site

Specifications

Max. Pulling Capacity	2,000 lb. (rated at top of drum)
Max. Line Speed	4 mph (at top of drum)
Payout Brake	Hydraulic disc-caliper, electric-over-hydraulic w/ finite PSI control
Turret Rotation	360° continuous
Reel Capacity	6,000 ft. of 7/8 in. PE-12 rope
Drive System	Hydraulic motor, chain, sprocket
Engine	Turbocharged, Tier-4 final, diesel, 49 HP, water-cooled Kubota®
Fuel Capacity	13 gal.
Hydraulic Fluid	ISO Grade 32
Hydraulic Reservoir	25 gal.
Levelwind	Hydraulically-controlled, joystick controlled (2)
Operator's Safety Enclosure	Safe-Zone® cab, open/half cab, turret-mounted
Frame Construction	Steel tubing, continuous weld
Length	16 ft. 11 in.
Width	8 ft. 1 in.
Height	9 ft. 10 in.
Weight*	11,990 lb.
GVWR	12,500 lb.
Suspension	Leaf-spring
Axle Configuration	Single
Wheel Configuration & Tires	235/75R 17.5
Brakes (Trailer)	Electric w/ break-away switch
Towing Attachment	3 in. pintle eye w/ (2) safety chains & hooks
Tie Downs	3/4 in. dia. steel D-rings
Tongue Jack	Hydraulic w/ galvanized shoe (1)
Stabilizing Jacks	Hydraulic w/ galvanized shoe (4)
Electrical System	12 VDC
Battery	12V, Group 27
Lights/Navigation	US DOT, LED, 12 VDC
Grounding	3/4 in. dia. copper-clad steel loops (4)
Wheel Chocks	Standard
Fire Extinguisher	ABC
Color	S+R white
Drum Covers	Vinyl
Grips & Swivels	1038 Kellems grip & B-40 swivel

Options

- Solar charger
- Galvanized finish



Braking System with Electric-Over-Hydraulic Activation



Ergonomic Operator's Station

*Specifications are subject to change