


Swivels and Connectors

S+R precision-machined, alloy steel swivels and connectors are designed for overhead line stringing. Equipped with neoprene seals with stainless steel spring retainers, our accessories are compatible with various strengths of pulling line and grips.

Swivels

Specifically designed for overhead line stringing, these swivels are reliable and heavy-duty with adequate load rating for tension stringing, yet small enough in diameter to pass through conductor stringing blocks. Swivels should never be passed through bullwheels. Be sure to check the diameter of the swivel against the dimension on the blocks, etc. Swivels are precision-machined, alloy steel and heat-treated for maximum strength and wear resistance. Swivels should be compatible with strengths of pulling line and grips. These swivels (D-160 ¾ in.) are not recommended for underground use in conduit.

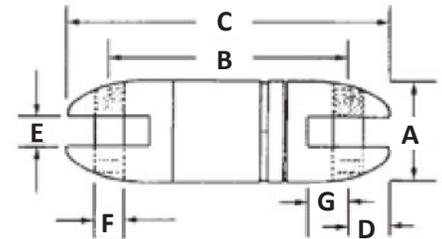

Connectors/swivels are not designed to be pulled over sheaves or bullwheels.


Model No.	Wire Rope Size (in.)	Max. Working Load (lb.)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)	Swivel Weight (lb.)
A-18	¼	1,800	⅞	2 1⁄₃₂	3 ⅜	1⁵⁄₃₂	⅕	⅕	1⁹⁄₃₂	⅜
B-40	½	4,000	1 ¼	3 ⅔	4 ½	1¹⁄₂₅	⁵⁹⁄₁₀₀	1⁹⁄₅₀	⁶⁹⁄₁₀₀	1
B-75	½	7,500	1 ½	4	5 ⅜	1¹⁄₁₆	⅝	⅜	⅞	1 ¾
C-100	⅝	10,000	1 ⅞	5 ⅞	7 ⅞	1³⁄₁₆	¾	⅝	1⁵⁄₁₆	4
D-160	¾	16,000	2 ⅞	7 ⅞	10 ⅞	1 ⅞	1	⅞	1 ⅞	8
D-300	1	30,000	2 ½	8 2⁹⁄₃₂	11 5⁄₃₂	1 ⅞	1	⅞	1 ⅞	9

Connectors

Sherman+Reilly connectors are a convenient, economical way to connect when rotation is not needed or is detrimental. These connectors do not rotate. They are not intended as a swivel replacement if rotation is desired. These connectors provide a fast, cost-effective method of connecting pulling lines and conductors. Constructed of high-strength, heat-treated steel, connectors are short and light with a contoured nose to allow easy passage through sheaves.

Connectors/swivels are not designed to be pulled over sheaves or bullwheels.

Model No.	Max. Working Load (lb.)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)
L-40	4,000	1 ¼	½	⅝	2 ¾	⅕	1 ⅞	¾
L-75	7,500	1 ⅞	⅝	⅞	3 5⁄₁₆	⅕	2 3⁄₁₆	2⁷⁄₃₂
L-100	10,000	1 ⅞	¾	⅝	4 ½	1³⁄₁₆	2 ⅞	1 ⅞
L-133	20,000	2	¾	⅝	4 ¾	⅞	3	1 ⅞

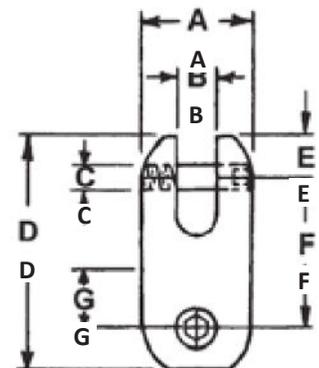

*Specifications are subject to change